

48V On/Off Control Using Remote Control (RC) Pin



Design Note 015

Flex Power Modules

48V On/Off Control Using Remote Control (RC) Pin

In some applications it is necessary to have a precise turn on and turn off level. The circuit below is useful for setting turn on and turn off in the range of 36-75 V.

The voltage level for turn off is set by resistors R1 and R2.


The turn on level is given by R2 in parallel with R6. A lower value on R6 will increase the hysteresis and a higher value will decrease it.

$$V_{\text{off}} = 2.495 \times \frac{(R1 + R2)}{R2}$$

The following values were used to set turn on at 43 V and turn off at 41 V:

R1, R6	39 kΩ
R2	2.53 kΩ
R3, R5, R8	15 kΩ
R4	220 kΩ
R7	560 kΩ
D1	TL 431 programmable reference diode
D2, D3	1N4148 or similar
Z1	33 V zener 0.25 W
Q1	2N5551 or similar

Resistors 0.25 W unless otherwise stated.

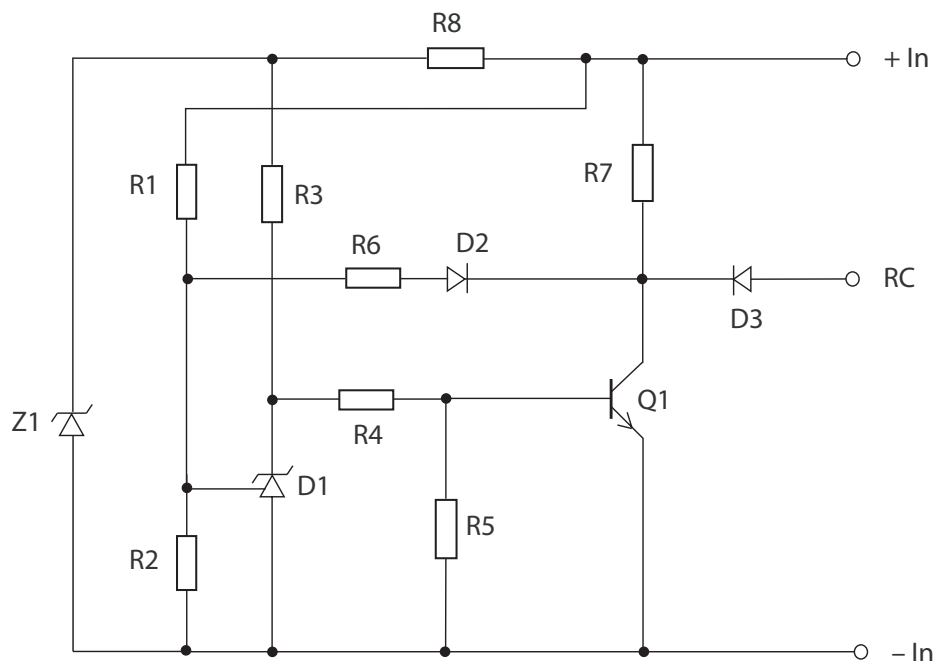

Formed in the late seventies, Flex Power Modules is a division of Flex that primarily designs and manufactures isolated DC/DC converters and non-isolated voltage regulators such as point-of-load units ranging in output power from 1 W to 700 W. The products are aimed at (but not limited to) the new generation of ICT (information and communication technology) equipment where systems' architects are designing boards for optimized control and reduced power consumption.

Flex Power Modules
Torshamnsgatan 28 A
164 94 Kista, Sweden
Email: pm.info@flex.com

Flex Power Modules - Americas
600 Shiloh Road
Plano, Texas 75074, USA
Telephone: +1-469-229-1000

Flex Power Modules - Asia/Pacific
Flex Electronics Shanghai Co., Ltd
33 Fuhua Road, Jiading District
Shanghai 201818, China
Telephone: +86 21 5990 3258-26093

The content of this document is subject to revision without notice due to continued progress in methodology, design and manufacturing. Flex shall have no liability for any error or damage of any kind resulting from the use of this document