


# Forced Air Cooling of DC/DC Power Modules At High Altitude

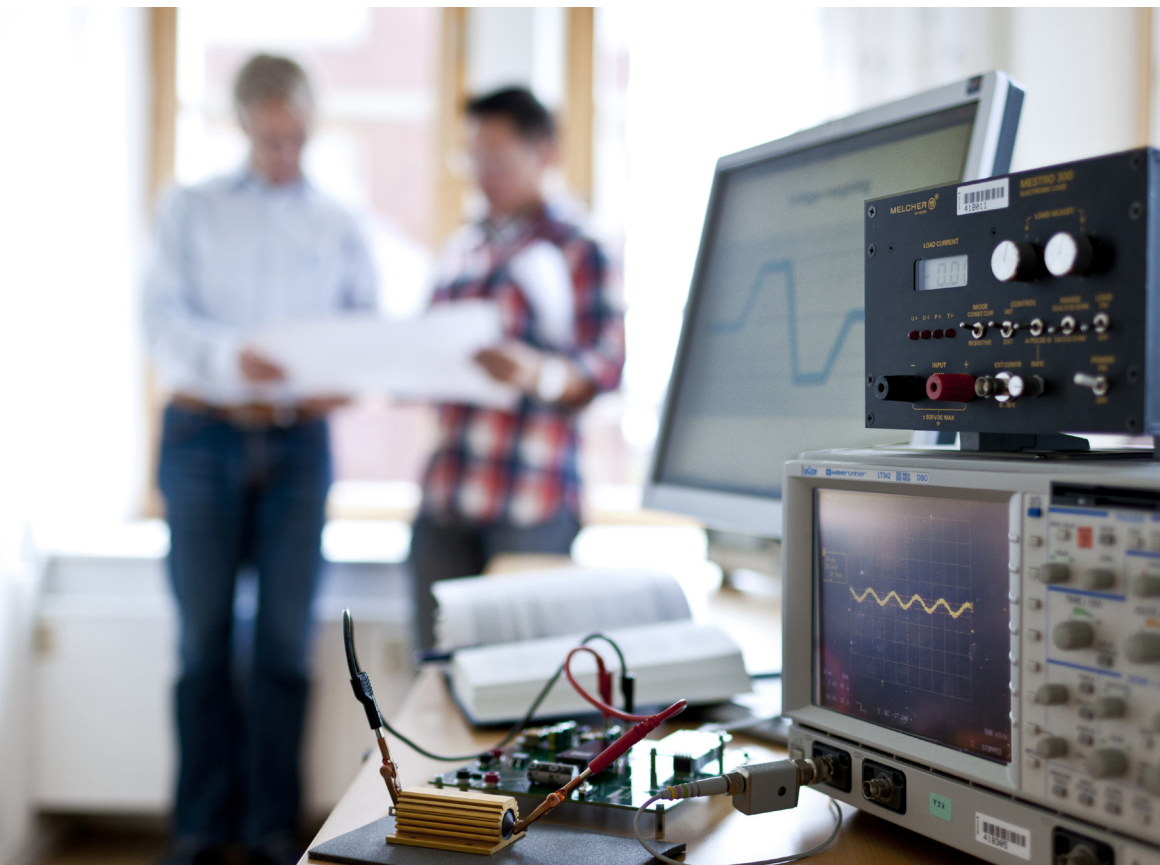


## Abstract

Due to lower air density at higher elevations, the convective heat transfer capabilities of air can vary depending on elevation. For uncontrolled environment this adverse effect is offset by a lower ambient temperature at higher elevations. For temperature controlled environment, the heat transfer will be slightly affected. This can be offset by a lower operating temperature or by higher fan air speeds. The air speed is not dependent on elevation.


This Design Note will focus on the relationship between air convective heat transfer and elevation. This should be considered within the context of cooling DC/DC converters and their associated thermal derating curves.

## Forced Air Cooling

The graph below shows how air convective heat transfer varies with elevation and laminar air speed. We can see that for identical temperatures, an increase in air speed from e.g. 2 m/s to about 3.5 m/s is needed to obtain the same heat transfer ratio at 4000 meters compared to sea level.

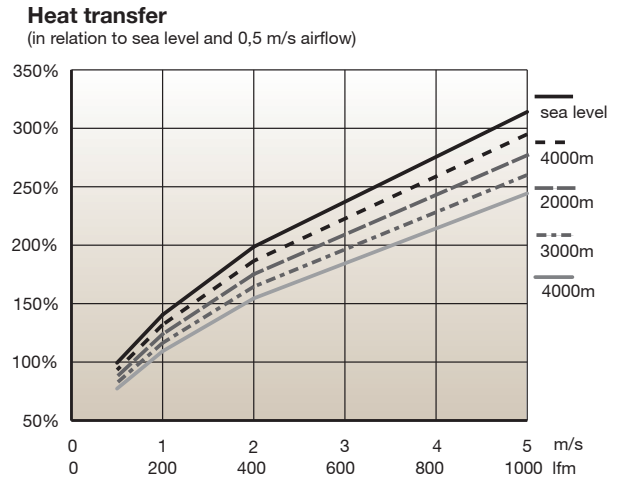

The diagram below shows how the cooling efficiency deteriorates with high altitude:

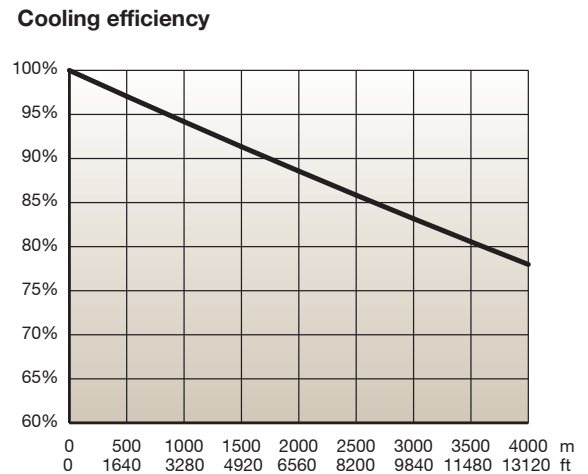

Another way to put this is the following tabulated derating factors for the same temperature at different altitudes:

| Altitude<br>meter | Altitude<br>feet | Derating factor |
|-------------------|------------------|-----------------|
| 0                 | 0                | 1.00            |
| 500               | 1640             | 0.97            |
| 1000              | 3280             | 0.94            |
| 1500              | 4920             | 0.91            |
| 2000              | 6560             | 0.89            |
| 2500              | 8200             | 0.86            |
| 3000              | 9840             | 0.83            |
| 3500              | 11480            | 0.81            |
| 4000              | 13120            | 0.78            |

## How Temperature and Pressure Varies with Altitude

From the table one can see that for outdoor applications, the temperature normally is considerably colder at 4000 m, 13120 ft, compared to sea level (about 25°C) which for most applications compensates the loss in heat transfer.

| Altitude<br>meter | Temperature<br>°C | Pressure<br>kPa | Density<br>kg/m <sup>3</sup> |
|-------------------|-------------------|-----------------|------------------------------|
| -500              | 18                | 108             | 1.29                         |
| 0                 | 15                | 101             | 1.23                         |
| 500               | 12                | 95              | 1.17                         |
| 1000              | 9                 | 90              | 1.11                         |
| 1500              | 5                 | 85              | 1.06                         |
| 2000              | 2                 | 80              | 1.01                         |
| 2500              | -1                | 75              | 0.96                         |
| 3000              | -4                | 70              | 0.91                         |
| 3500              | -8                | 66              | 0.86                         |
| 4000              | -11               | 62              | 0.82                         |
| 4500              | -14               | 58              | 0.78                         |
| 5000              | -17               | 54              | 0.74                         |

Formed in the late seventies, Flex Power Modules is a division of Flex that primarily designs and manufactures isolated DC/DC converters and non-isolated voltage regulators such as point-of-load units ranging in output power from 1 W to 700 W. The products are aimed at (but not limited to) the new generation of ICT (information and communication technology) equipment where systems' architects are designing boards for optimized control and reduced power consumption.

Flex Power Modules  
Torshamnsgatan 28 A  
164 94 Kista, Sweden  
Email: [pm.info@flex.com](mailto:pm.info@flex.com)

Flex Power Modules - Americas  
600 Shiloh Road  
Plano, Texas 75074, USA  
Telephone: +1-469-229-1000

Flex Power Modules - Asia/Pacific  
Flex Electronics Shanghai Co., Ltd  
33 Fuhua Road, Jiading District  
Shanghai 201818, China  
Telephone: +86 21 5990 3258-26093

The content of this document is subject to revision without notice due to continued progress in methodology, design and manufacturing. Flex shall have no liability for any error or damage of any kind resulting from the use of this document